EKI TECHNICAL PRESENTATION

COSUMNES SUBBASIN GSP IMPLEMENTATION

17 OCTOBER 2022 COSUMNES GROUNDWATER AUTHORITY BOARD OF DIRECTORS MEETING



1




GRANT SOLICITATION

- Opened October 4th, with applications due by November 30th
- Very competitive: total of \$230 million available for 94 eligible basins (\$2.5 million per basin if split evenly)
- Each grant can ask for \$1 to \$20 million
- Cost share not required; however, additional points will be given to those who have a cost share of at least 5% of total project cost
 - Shows commitment!!
- All work must be completed by June 30, 2026



Milestone or Activity	Tentative Schedule	
SGMA Implementation Round 2 Grant Solicitation Opens	October 4, 2022	
SGMA Implementation Round 2 - Application Workshop	October 20, 2022, 10 a.mNoon (PST)	
SGMA Implementation Round 2 Grant Solicitation Closes	November 30, 2022, at 5 p.m. (PST)	
Draft Award List Posted for Public Review	May 2023	
Final Award List Posted	August 2023	
Execute Agreements	September-November 2023	

leki

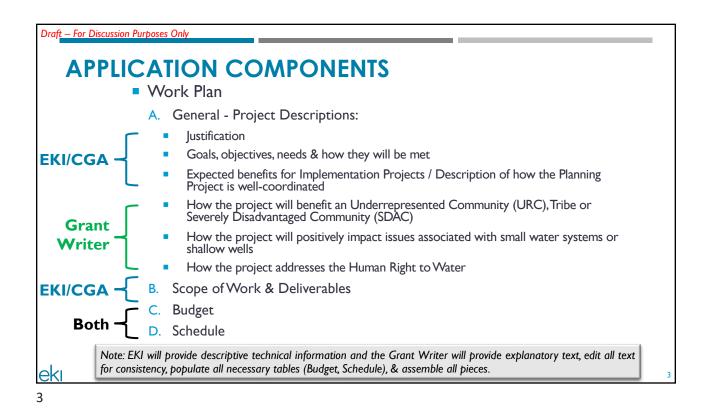

PROPOSED COSUMNES PROJECTS

- I. Managed and Natural Aquifer Recharge (Section 18.2.4 in the GSP)
 - Stream impoundments to store rainfall runoff.
 - Surface water from outside the basin delivered by natural drainages .
 - Local farm-scale rainwater capture projects.
- 2. Representative Monitoring Network Improvements (Section 19.1.2 "Data Gap Filling Efforts" in the GSP)
- **3. Water Conservation** (Section 18.2.4 in the GSP)
 - Land use changes toward less water intensive crops.
 - Water use efficiency, management and conservation projects.
- 4. Voluntary Land Repurposing (Section 18.2.3 PMA #5)

ek

MANAGED AND NATURAL AQUIFER RECHARGE (1 OF 3)

Jackson Creek

Dry Creek

LOCAL DIVERSION PROJECTS

- Outreach to landowners along Dry Creek & Laguna Creek to identify lands with existing diversion infrastructure & willingness to participate.
- Locate Project sites focused along Dry Creek and Laguna Creek.
- Rank potential sites based on location & surface/subsurface hydrogeologic conditions.
- CGA select up to 4 sites to secure access for confirmation studies & project development
 - Confirm site suitability (geophysics/infiltration tests/source water and groundwater quality)
 - Plan & design diversion and recharge infrastructure for 1-2 sites
 - Approve plans and construct infrastructure
- Locate, design & construct necessary monitoring equipment to quantify benefits (e.g., meters, weirs, monitoring wells, etc.)
- Update appropriate model input files

Table 1. Summary of Available Surface Water Supplies from Water Year 1990 through 2021.						
Creek	90 Th Percentile Flow, CFS	Max Diversion Flow Rate, CFS	Max. Avg Annual Diversion Volume, AF	Expected Avg Annual Diversion Volume, AF (Note 1)		
Badger Creek	26	24	700	700		
Laguna Creek	325	225	7,300	1,000		
Hadselville Creek	20	6	100	100		

2,700

10,500

21,300

800

1,000

3,600

tes:

1.) The expected near-term diversion volume is based on a maximum diversion of 15 CFS. Higher rates of diversion may be possible depending on site specific constraints and available funding.

Note: Model-calculated surface water flows suggest that 85% of available surface water for diversions are from flows in Dry and Laguna Creeks. The runoff would be directed to local percolation basins and/or dry wells for infiltration into the Basin if site suitability assessments confirm project feasibility.

5


Draft - For Discussion Purposes Only

MANAGED AND NATURAL AQUIFER RECHARGE (2 OF 3)

ON-FARM STORMWATER CAPTURE

- Utilize data from the GSP and CoSANA model to identify high volume sites with acceptable soil conditions
- Rank candidate sites base on expected runoff volumes, expected infiltration rates & subsurface conditions
- CGA select up to 4 sites to secure access to
 - Confirm site suitability (geophysics/infiltration tests/source water and groundwater quality)
 - Plan & design diversion and recharge infrastructure for I-2 sites
 - Approve plans and construct infrastructure
- Locate, design & construct necessary monitoring equipment to quantify benefits (e.g., meters, weirs, monitoring wells, sampling stations, etc.)

Update appropriate model input files

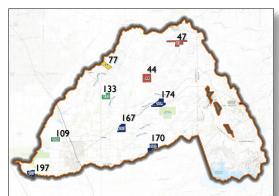

Note: Map shows example land parcels with model-calculated average (1990-2021), annual runoff in acre-feet (AF).

<u>ekı"</u>

6

MANAGED AND NATURAL AQUIFER RECHARGE (3 OF 3)

FLOOD-MAR ANALYSIS (LAGUNA CREEK)

- Multi-benefit Flood-MAR Opportunities Analysis
- Draft Scope of Work developed by cbec eco engineering
 - Data Discovery
 - Field Data Collection and Monitoring
 - Hydrologic Model Development
 - Hydraulic Model Development and Simulation
 - Ecological Floodplain Inundation Potential Analysis (EcoFIP)
 - Reporting and Outreach



Figure 1 - EcoFIP ecohydraulic modeling framework.


<u>ekı</u>

7

Draft - For Discussion Purposes Only

REPRESENTATIVE MONITORING NETWORK IMPROVEMENTS

- The SGMA Monitoring Network (RMWs) provides data to evaluate Sustainable Management Criteria (SMCs) and assess Sustainability Indicators for the Basin
- Multiple data gaps within the networks were identified in the GSP
- Improving the monitoring network includes the following task
 - Downhole video log/surveying of current RMWs
 - Construct monitoring well sites located near DACs, GDEs areas, and within the mapped cone of depression
 - Expand the network of supplemental domestic and agricultural wells to confirm the SGMA monitoring network is representative. (supplemental wells do not have assigned SMCs)
 - Update appropriate model input files

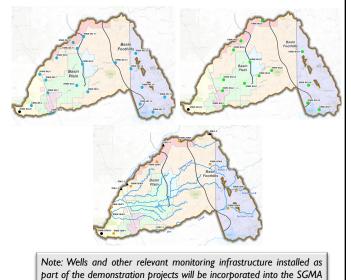


Monitoring Network as appropriate to also fill identified data gaps.


<u>ekı</u>

WATER CONSERVATION

- Additional outreach to landowners
- Use updated land use data (work task under Land Repurposing project) and update ET estimates to refine consumptive use estimates
- Identify & rank candidate demonstration project sites based on site conditions (soil characteristics, land uses, current irrigation & water practices, & conduciveness to testing selected BMPs)
- CGA select up to 4 sites to secure access for
 - Site inspection by Agricultural Consultant
 - Identify recommended BMPs & plan/design conservation activities
 - Approve plans & construct necessary field modifications and necessary infrastructure
- Locate, design & construct necessary monitoring equipment to quantify benefits (e.g., meters, weirs, monitoring wells, etc.)

Update appropriate model input files





Flow meter monitoring



Note: Commercially available weather stations can be installed along with other tracking equipment to measure and record soil moisture, water flows, water levels, and climate data at strategically placed stations in the basin.

9

Draft - For Discussion Purposes Only

VOLUNTARY LAND REPURPOSING

- Additional outreach to landowners
- Update land use map & data
- Develop scoring framework to identify & rank sites for possible projects
 - Land characteristics
 - Revenue generated by existing use
 - Landowner preferences
 - Implementation timeframe & estimated benefits
- Identify 2 to 3 demonstration projects
- Locate, design & construct necessary monitoring equipment to quantify benefits (e.g., meters, weirs, monitoring wells, etc.)

Update appropriate model input files

